



LAZER

HIGH PERFORMANCE LIGHTING

LAZERLAMPS.COM

SEE MORE GO FURTHER GO SAFER

WHY BUY A LAZER PRODUCT...

LAZER IS RECOGNISED AS A GLOBAL LEADER IN THE DEVELOPMENT AND MANUFACTURE OF LIGHTING PRODUCTS FOR THE SECTORS WE SERVE. AS A UK BASED MANUFACTURER WE WILL DELIVER UPON CUSTOMER EXPECTATIONS FOR HIGH QUALITY AND HIGH INNOVATION LIGHTING SOLUTIONS.

Understanding the importance of being environmentally responsible while focusing on sustainability ensures that our customers can feel good about the Lazer products they purchase. Outstanding customer service is essential to building lasting relationships, and we strive to exceed expectations in every interaction. By prioritising product quality, we ensure our customers receive products that meet their needs and perform exceptionally. These core values reflect our commitment to meeting the needs of a global market.

THERMAL CONDUCTIVITY

maximised through CAE optimised heatsink constructed from anodised aluminium.

ADVANCED PRE-TREATMENT PROCESSES

assure marine grade corrosion resistance.

CORROSION RESISTANCE

enhanced by E-Coat pre-treatment.

UNBREAKABLE POLYCARBONATE LENS

with lifetime guarantee.

LONG RANGE BEAM PATTERN

Combines ultra-long distance illumination with wide spread.

OPTIONAL POSITION LIGHT FUNCTION

included across Standard products. White (Reg 7 approved) and Amber colours.

VERSATILE MOUNTING SYSTEM

fully robust and able to position above or below lamp.

HARDCOAT LACQUER

protects against scratches or deterioration of lens condition.

SIDE BRACKET MOUNTING

facilitated with concealed threaded point.

ROAD-LEGAL CERTIFICATION

allows for electrical connection direct to the vehicle's high beam (and side light) signals.

VACUUM-METALLISED OPTICS

deliver unparalleled reflectivity for maximised light output.

HIGH INTENSITY 'PREMIUM BIN' LEDS

maximise illumination levels considering power input.

DYNAMIC DRIVE MODULATION

maintains optimal light output considering the environmental and thermal conditions of the lamp.



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



LINEAR



REPRESENTING THE VERY BEST IN SLIMLINE AUXILIARY HIGH BEAM DRIVING LIGHTS AND EXCEPTIONAL VALUE FOR MONEY, THE LINEAR RANGE FEATURES A LOW-PROFILE DESIGN PERFECT FOR FACILITATING INSTALLATION WHERE SPACE MIGHT BE LIMITED OR WHEN LOOKING FOR A DISCREET INSTALLATION.


By combining highly-efficient 3W LEDs with ultra-reflective, vacuum-metallised reflectors, the Linear range delivers finely tuned light distribution, providing exceptional visibility, including at the sides of the road. Additionally, a comparatively lower up/down spread ensures the Linear is ideally suited for mounting towards ground level on a vehicle's front end.

FEATURES


- LOW PROFILE CROSS SECTION
- HIGH DENSITY 3W LED TECHNOLOGY
- ECE APPROVED FOR ROAD USE
- OPTIMISED FOR LOWER MOUNTING POSITIONS
- 5 YEAR WARRANTY
- IP68 WATERTIGHT

LINEAR RANGE ISOLUX PERFORMANCE


LINEAR-18

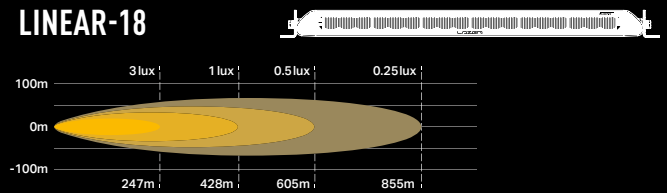

LINEAR-12

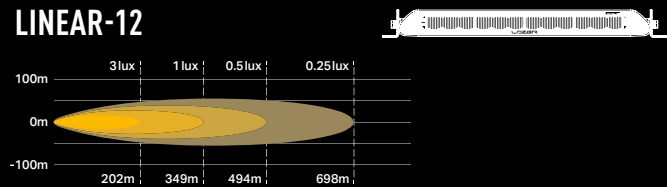


LINEAR-6

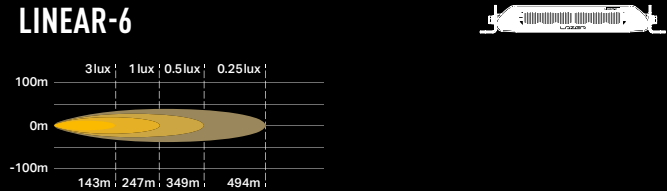

TECHNICAL SPECS

	LINEAR-6	LINEAR-12	LINEAR-18
E-MARK REFERENCE	12.5	27.5	30.0
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	2,250	4,500	6,750
BEAM PATTERN	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	494M	698M	855M
NO. HIGH POWER LEDs	6	12	18
POWER CONSUMPTION	21W	42W	63W
CURRENT DRAW (AT 14.4V)	1.5A	2.9A	4.4A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	495G	800G	1,090G

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
LINEAR-6	232	62	40	41-54	58	77
LINEAR-12	382	62	40	41-54	58	77
LINEAR-18	532	62	40	41-54	58	77

LINEAR LIGHT OUTPUT

LINEAR-12



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



LINEAR



THE LINEAR PRODUCTS, DESPITE THEIR DIMINUTIVE PROPORTIONS, COME PACKED WITH ADVANCED FEATURES FOR MARKET-LEADING PERFORMANCE AND LONGEVITY. ENGINEERED FOR DAY-TO-DAY ROOF MOUNTING AND OFF-ROAD USE, THE LINEAR-36, LINEAR-42, AND LINEAR-48 ARE IDEAL FOR THOSE SEEKING HIGH-QUALITY LED LIGHT BARS.


Rigorously tested at the pinnacle of professional motorsport, these lights seamlessly integrate with modern vehicles, providing understated style and unparalleled lighting performance. With a sleek, low-profile design, smooth lines, and contemporary features, experience the perfect blend of form and function with the Linear range of lights.

FEATURES


- AERODYNAMIC DESIGN VIRTUALLY ELIMINATES WIND NOISE
- ECE CERTIFICATION (36 AND 42 MODELS)
- CONTEMPORARY DESIGN FEATURES
- COMPATIBLE ROOF MOUNTING KITS AVAILABLE
- MINIMAL GLARE FROM ROOF INSTALLATIONS
- ANTI-THEFT SECURITY FIXINGS

LINEAR RANGE ISOLUX PERFORMANCE


LINEAR-48



LINEAR-42




LINEAR-36



TECHNICAL SPECS

	LINEAR-36	LINEAR-42	LINEAR-48
E-MARK REFERENCE	50.0	50.0	N/A
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	13,500	15,750	18,000
BEAM PATTERN	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	940M	984M	1,101M
NO. HIGH POWER LEDS	36	42	48
POWER CONSUMPTION	126W	147W	168W
CURRENT DRAW (AT 14.4V)	8.8A	10.2A	11.7A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	2,700G	3,500KG	4,000KG

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
LINEAR-36	982	62	40	41-54	58	77
LINEAR-42	1,132	62	40	41-54	58	77
LINEAR-48	1,282	62	40	41-54	58	77



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



LINEAR ELITE



EXPERIENCE A NEW LEVEL OF LIGHTING PERFORMANCE WITH THE LINEAR ELITE RANGE. DEVELOPED WITH EFFORTLESS INTEGRATION IN MIND WITH A SLIMLINE, AERODYNAMIC DESIGN. DON'T BE FOOLED BY THE MODEST PROPORTIONS OF EACH LAMP, THEY PACK A POWERFUL PUNCH! SEEING IS BELIEVING!

Delivering expertly engineered light distribution for unmatched visibility with carefully calibrated intensity and spread illumination, you'll enjoy unrivalled clarity in any driving conditions. For added safety and style, you can opt for the Linear-12 Elite or Linear-18 Elite, which feature an integrated position light function. Choose Elite for even greater visibility and lighting performance, and drive with confidence.


FEATURES

- UNRIVALLED LIGHTING PERFORMANCE
- LOW PROFILE CROSS SECTION
- ADVANCED LED TECHNOLOGY
- ECE APPROVED FOR ROAD USE
- AUTOMOTIVE GRADE CORROSION RESISTANCE
- INTEGRATED POSITION LIGHT FUNCTION AVAILABLE (12 & 18 ONLY)

TECHNICAL SPECS

	LNR-6 ELITE	LNR-12 ELITE	LNR-18 ELITE	LNR-24 ELITE
E-MARK REFERENCE	17.5	37.5	45.0	30+30
VOLTAGE RANGE	10-32V	10-32V	10-32V	10-32V
RAW LUMENS	4,050	8,100	12,150	18,000
BEAM PATTERN	WIDE	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	563M	796M	975M	1,126M
NO. HIGH POWER LEDS	12	24	36	48
POWER CONSUMPTION	42W	84W	126W	188W
CURRENT DRAW (AT 14.4V)	2.9A	5.8A	8.8A	13.1A
LED LIFE (HOURS)	50,000*	50,000*	50,000*	50,000*
WEIGHT	495G	800G	1,090G	1,500G

*LED manufacturers specification




DIMENSIONS


	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
LINEAR-6 ELITE	232	62	40	41-54	58	77
LINEAR-12 ELITE	382	62	40	41-54	58	77
LINEAR-18 ELITE	532	62	40	41-54	58	77
LINEAR-24 ELITE	682	62	40	41-54	58	77

LINEAR RANGE ISOLUX PERFORMANCE


LINEAR-24 ELITE

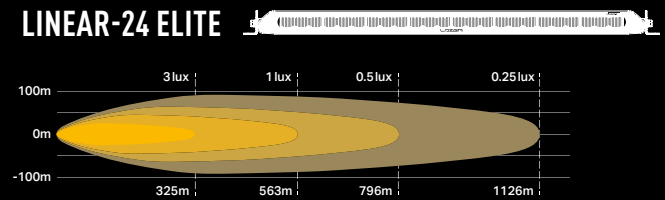


LINEAR-18 ELITE

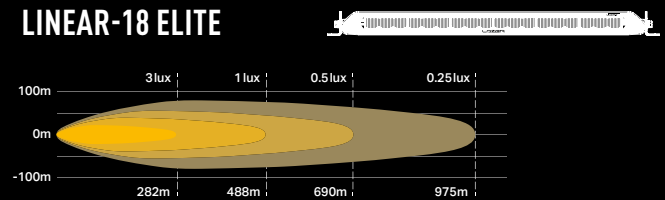

LINEAR-12 ELITE

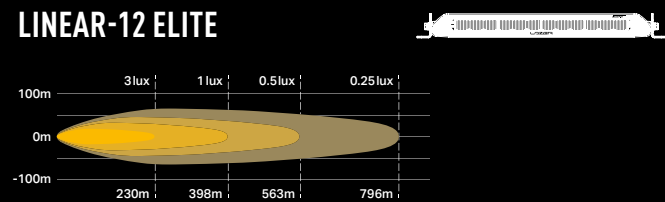

LINEAR-6 ELITE

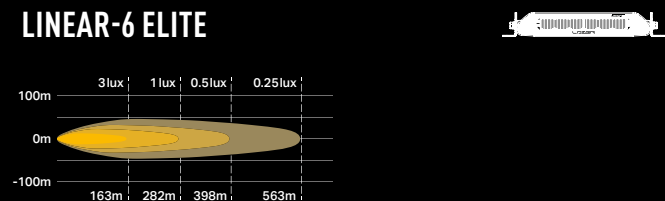

LINEAR ELITE LIGHT OUTPUT

LINEAR-18 ELITE



SEE MORE GO FURTHER GO SAFER
MADE IN THE UK & BUILT TO LAST



LINEAR ELITE



BOASTING OVER TWICE THE LIGHT OUTPUT COMPARED TO STANDARD VERSIONS, THE 'BIG' LINEAR-36/42/48 ELITE DELIVER UNBELIEVABLE LIGHTING PERFORMANCE WHEN OFF-ROAD DRIVING. THEIR VERSATILE DESIGN MAKES THEM SUITABLE FOR VARIOUS MOUNTING OPTIONS, AND THEIR SLEEK, AERODYNAMIC ALUMINIUM HOUSING ELIMINATES WIND NOISE, PROVIDING A QUIET AND COMFORTABLE RIDE.


With its advanced features, superior performance, and innovative design, the Linear Elite range features an optical design optimised to provide a combination of long-distance illumination and wide-angle lighting, for a safer, more enjoyable night driving experience. The Linear Elite range is the perfect choice for those who demand the best lighting technology, in an understated but sleek and elegant product design.

FEATURES


- COMBINATION SPOT AND WIDE ANGLE OPTICS
- 'UNBREAKABLE' POLYCARBONATE LENS
- OPTIMISED FOR ROOF MOUNTING
- HIGHLY EFFICIENT 3W 'PREMIUM BIN' LEDs
- LOW-PROFILE DESIGN FOR EASY INSTALLATION
- SUPPLIED WITH WIRING KIT

LINEAR RANGE ISOLUX PERFORMANCE


LINEAR-48 ELITE

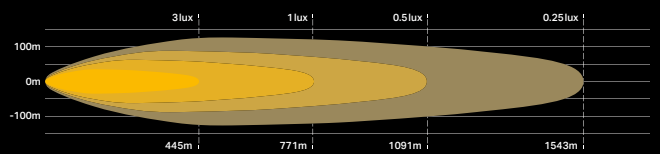

LINEAR-42 ELITE

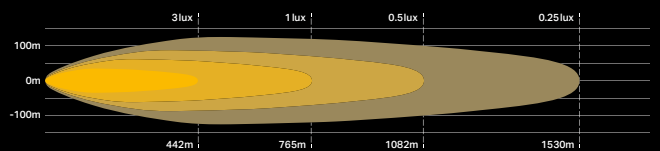


LINEAR-36 ELITE

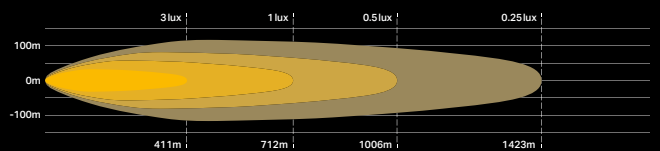

TECHNICAL SPECS

	LNR-36 ELITE	LNR-42 ELITE	LNR-48 ELITE
E-MARK REFERENCE	N/A	N/A	N/A
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	29,700	33,300	34,800
BEAM PATTERN	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	1,423M	1,530M	1,543M
NO. HIGH POWER LEDs	72	84	96
POWER CONSUMPTION	308W	355W	364W
CURRENT DRAW (AT 14.4V)	21.4A	24.7A	25.3A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	2.7KG	3.5KG	4.0KG

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
LINEAR-36 ELITE	982	62	40	41-54	58	77
LINEAR-42 ELITE	1,132	62	40	41-54	58	77
LINEAR-48 ELITE	1,282	62	40	41-54	58	77

LINEAR ELITE LIGHT OUTPUT

LINEAR-48 ELITE



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



LAZER ELITE+

ELITE+



THE ELITE+ LED LIGHTING RANGE OFFERS IMPROVED PERFORMANCE, LIGHT DISTRIBUTION, AND FUNCTIONALITY. IT INCORPORATES SUPPLEMENTAL YELLOW LEDS FOR ENHANCED VISIBILITY. YOU CAN USE THEM IN COMBINATION WITH THE WHITE HIGH BEAM FOR SOFTER NIGHTTIME ILLUMINATION OR USE THE YELLOW LEDS ALONE FOR IMPROVED VISIBILITY IN ADVERSE WEATHER CONDITIONS LIKE SNOW, FOG OR DUST.

These lights have multiple modes: Boost (white), Combo (white + yellow), Snow/Fog/Dust Mode (yellow), and E-Mark/Low Output (white). They feature a memory function to retain the last mode used and can instantly switch to E-Mark/Low Output mode with a 2-second press of the switch.

FEATURES

- COMBINATION OF WHITE AND YELLOW HIGH-EFFICIENCY LEDS
- FINELY TUNED BEAM PATTERN
- UNRIVALLED LIGHTING PERFORMANCE
- YELLOW ONLY LEDS FOR DUST, FOG AND SNOW
- 'UNBREAKABLE' POLYCARBONATE LENS
- FEATURE MEMORY FUNCTION

TECHNICAL SPECS

	LINEAR-6 ELITE+	LINEAR-18 ELITE+	TRIPLE-R 1250 ELITE+	TRIPLE-R 24 ELITE+
E-MARK REFERENCE	17.5'	27.5'	20'	2 X 20'
VOLTAGE RANGE	10-32V	10-32V	10-32V	10-32V
RAW LUMENS	7,100	21,000	21,388	34,220
BEAM PATTERN	WIDE	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	621M	1,217M	1,649M	2,319M
NO. HIGH POWER LEDS	12 WHT / 6 YEL	36 WHT / 18 YEL	24 WHT / 20 YEL	48 WHT / 40 YEL
POWER CONSUMPTION	69W	190W	243W	375W
CURRENT DRAW (AT 14.4V)	5.1A	14.1A	16.9A	26.1A
LED LIFE (HOURS)	50,000*	50,000*	50,000*	50,000*
WEIGHT	495G	1,090G	2,400G	4,140G

Technical specifications shown are in Combo Mode (White & Yellow LEDs).
*LED manufacturers specification. †E-Mark compliant mode only.

DIMENSIONS

LINEAR-6 ELITE+	SEE LINEAR-6 ELITE - PAGE 6
LINEAR-18 ELITE+	SEE LINEAR-18 ELITE - PAGE 6
TRIPLE-R 1250 ELITE+	SEE TRIPLE-R 1250 - PAGE 14
TRIPLE-R 24 ELITE+	SEE TRIPLE-R 24 ELITE - PAGE 18

ELITE+ FUNCTIONALITY



BOOST MODE

White LEDs only.
Maximum output for a safer nighttime driving experience.



COMBO MODE

White & Yellow LEDs.
Combined at a lower colour temperature to suit driver preference.



SNOW/FOG/DUST MODE

Yellow LEDs only.
For use in adverse weather and environmental conditions.



E-MARK/ LOW OUTPUT MODE

White LEDs only.
Reduced output to avoid glare and reflections on nearby objects.



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



LAZER i-LBA



LINEAR-18 ELITE AND TRIPLE-R 1000/1250 ELITE PRODUCTS NOW OFFER A WORLD-FIRST; I-LBA, WHICH UTILISES TECHNOLOGY THAT REDEFINES THE PERFORMANCE AND FUNCTIONALITY OF AUXILIARY LED DRIVING LIGHTS. THIS INNOVATIVE FEATURE SETS OUR PRODUCTS APART FROM THE COMPETITION AND OFFERS DRIVERS UNPARALLELED LIGHTING CONTROL AND SAFETY.

The latest high-efficiency LEDs deliver a finely tuned beam pattern optimised for road use. Through the adoption of photoelectric sensors embedded within the driving light, when switching off the high beam, the lamp enters a Low Beam Assist mode, which maintains additional levels of illumination in zones where there are confirmed no oncoming vehicles or obstacles.

FEATURES

- COMBINATION HIGH-EFFICIENCY LEDs
- FINELY TUNED BEAM PATTERN
- PHOTOELECTRIC SENSORS DETECT ONCOMING TRAFFIC
- PATENT-PENDING TECHNOLOGY
- ECE APPROVED FOR ROAD USE
- 5 YEAR WARRANTY

TECHNICAL SPECS

	LINEAR-18 ELITE i-LBA	TRIPLE-R 1000 ELITE i-LBA	TRIPLE-R 1250 ELITE i-LBA
E-MARK REFERENCE	17.5	30.0	40.0
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	18,000 / 5,538	11,068 / 3,423	16,136 / 4,602
BEAM PATTERN	WIDE	WIDE	WIDE
BEAM DISTANCE (0.25LX)	1,043 / 571M	1,362 / 746M	1,652 / 905M
NO. HIGH POWER LEDs	48	26	36
POWER CONSUMPTION	135 / 43W	95 / 32W	151 / 35W
CURRENT DRAW (AT 14.4V)	10.4 / 3.2A	6.6 / 2.3A	10.5 / 1.7A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	1,090G	1,700G	2,400G

*LED manufacturers specification

DIMENSIONS

LINEAR-18 ELITE i-LBA	SEE LINEAR-18 ELITE - PAGE 6
TRIPLE-R 1000 ELITE i-LBA	SEE TRIPLE-R 1000 ELITE - PAGE 14
TRIPLE-R 1250 ELITE i-LBA	SEE TRIPLE-R 1250 SMARTVIEW - PAGE 18

INTELLIGENT LOW BEAM ASSIST FUNCTIONALITY



LOW BEAM MODE

The vehicle is driving along with the standard low beam driving lights on.



HIGH BEAM MODE

The vehicle high beams are activated simultaneously the Lazer Lamps' high beam function turns on, for a safer, more enjoyable night drive experience.



LOW BEAM ASSIST MODE

A vehicle comes from the opposite direction. The high beams deactivate. The Lazer Lamps' product retains additional lighting at the side of the road.



LOW BEAM ASSIST MODE

Photoelectric sensors inside the light detect the car position and isolate zones of lighting to avoid dazzling, before reactivating once the vehicle passes.



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



TRIPLE-R



THE ICONIC TRIPLE-R RANGE OF AUXILIARY LED LIGHTS HAS SET THE STANDARD FOR THE PROFESSIONAL MOTORSPORT MARKET. THE LATEST UPGRADE DELIVERS EVEN MORE UNBEATABLE PERFORMANCE AND INNOVATION, SOLIDIFYING THE TRIPLE-R'S POSITION AS THE ULTIMATE CHOICE FOR DISCERNING DRIVERS.

The Triple-R range has a modern design with an increased light output, ideal for both on-road and off-road applications. It maintains a long-range 'spot' beam pattern while delivering a wider light spread. With white/amber position light options and outstanding high-beam performance, it is the best choice for those who demand high-quality auxiliary LED driving lights.


FEATURES

- CONTEMPORARY DESIGN
- DUAL OUTPUT E-BOOST TECHNOLOGY (ECE APPROVED)
- 5 YEAR WARRANTY
- DESIGNED & MANUFACTURED IN THE UK
- INCLUDES VERSATILE 'CENTRE MOUNT' MOUNTING SYSTEM
- OPTIONAL WHITE/AMBER POSITION LIGHT

TECHNICAL SPECS

	RRR 750	RRR 850	RRR 1000**	RRR 1250
E-MARK REFERENCE	35.0	45.0	12.5'	20.0'
VOLTAGE RANGE	10-32V	10-32V	10-32V	10-32V
RAW LUMENS	4,620	6,930	9,240 / 1,848	13,860 / 2,772
BEAM PATTERN	SPOT	SPOT	SPOT	SPOT
BEAM DISTANCE (0.25LX)	866M	1,061M	1,225 / 548M	1,500 / 671M
NO. HIGH POWER LEDS	4	6	8	12
POWER CONSUMPTION	44W	66W	88 / 17.6W	125 / 25W
CURRENT DRAW (AT 14.4V)	3.1A	4.6A	6.1 / 1.2A	8.7 / 1.7A
LED LIFE (HOURS)	50,000*	50,000*	50,000*	50,000*
WEIGHT	1,000G	1,340G	1,700G	2,400G

*E-Mark compliant mode only *LED manufacturers specification **Also applies to Triple-R 1000 Beacon




DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
TRIPLE-R 750	230	105	73	103	73-103
TRIPLE-R 850	322	105	73	103	73-103
TRIPLE-R 1000	400	105	73	103	73-103
TRIPLE-R 1250	590	105	73	103	73-103

TRIPLE-R RANGE ISOLUX PERFORMANCE


1250

BOOST FUNCTION ENGAGED*

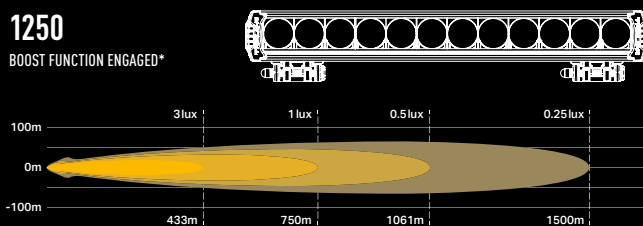


1000 / 1000 BEACON

BOOST FUNCTION ENGAGED*

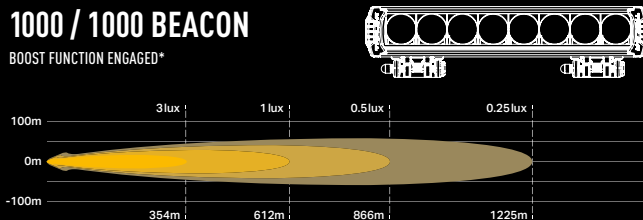


The iconic Triple-R 1000 is now offered with integrated amber **flashing beacon function**. Incorporating 16 forward-facing flash patterns, the additional safety functionality within the lamp, combines with the possibility to connect a white or amber position/side light function, as well as the exceptional high beam driving light function.

850

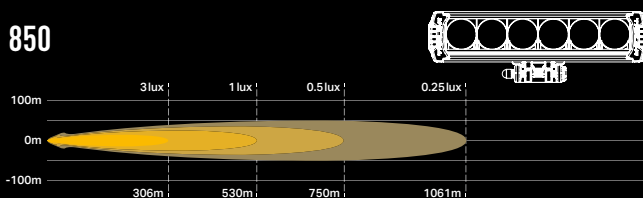

Applies to both **standard** and **position light** variants

750

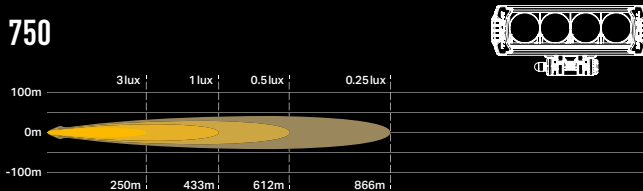

Applies to both **standard** and **position light** variants

TRIPLE-R LIGHT OUTPUT

TRIPLE-R 1000 - BOOST MODE



SEE MORE GO FURTHER GO SAFER
MADE IN THE UK & BUILT TO LAST



TRIPLE-R ELITE



FOR THE ULTIMATE IN ROAD LIGHTING SOLUTIONS, THE FRESHLY REVAMPED TRIPLE-R ELITE RANGE UTILISES A COMBINATION OF HIGHER-INTENSITY LEDS TO DELIVER EXCEPTIONAL DISTANCE ILLUMINATION BUT WITH SUPERIOR AMOUNTS OF LIGHT AT THE SIDES OF THE ROAD.

The Triple-R Elite series offers breathtaking illumination capabilities while utilising Lazer's E-Boost dual output technology. For use in either E-Boost or E-Mark Compliant mode, offering maximum versatility. All Lazer's products, including the Triple-R Elite range, are engineered and constructed in the UK with a steadfast dedication to delivering outstanding performance and superior craftsmanship.


FEATURES

- CLASS-LEADING PERFORMANCE
- 5 YEAR WARRANTY
- HIGH INTENSITY LEDS 11W FOR DISTANCE
- ADDITIONAL 3.5W LEDS FOR OUTSTANDING MID-RANGE SPREAD
- FULLY ECE APPROVED FOR ROAD USE
- IP68 WATERPROOF

TECHNICAL SPECS

	750 ELITE	850 ELITE	1000 ELITE
E-MARK REFERENCE	12.5'	17.5'	25.0'
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	5,068 / 1,267	8,068 / 2,017	10,136 / 2,534
BEAM PATTERN	DRIVE	DRIVE	DRIVE
BEAM DISTANCE (0.25LX)	1,033 / 462M	1,162 / 520M	1,358 / 607M
NO. HIGH POWER LEDS	4	6	8
POWER CONSUMPTION	46 / 11.5W	73 / 18.25W	104 / 23W
CURRENT DRAW (AT 14.4V)	3.2 / 0.8A	5.1 / 1.3A	7.2 / 1.6A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	1,000G	1,340G	1,700G

*E-Mark compliant mode only *LED manufacturers specification




DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
TRIPLE-R 750 ELITE	230	105	73	103	73-103
TRIPLE-R 850 ELITE	322	105	73	103	73-103
TRIPLE-R 1000 ELITE	410	105	73	103	73-103

TRIPLE-R ELITE ISOLUX PERFORMANCE


1000 ELITE

BOOST FUNCTION ENGAGED*




*Boost function is engaged when the supplied boost cap is fitted to the lamp, when the vehicle is off-road

E-MARK COMPLIANT MODE



850 ELITE



BOOST FUNCTION ENGAGED*



*Boost function is engaged when the supplied boost cap is fitted to the lamp, when the vehicle is off-road

750 ELITE

BOOST FUNCTION ENGAGED*



*Boost function is engaged when the supplied boost cap is fitted to the lamp, when the vehicle is off-road

TRIPLE-R ELITE LIGHT OUTPUT

TRIPLE-R 1000 ELITE - BOOST MODE



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



TRIPLE-R ELITE



THE TRIPLE-R 16/24/28 ELITE SERIES REPRESENTS THE PINNACLE OF OFF-ROAD LIGHTING. AVAILABLE IN LENGTHS UP TO 52 INCHES, IT BOASTS SHARED DNA WITH LIGHTING SOLUTIONS USED IN THE HIGHEST LEVELS OF PROFESSIONAL MOTORSPORTS.


Upgrade your off-road experience with the Triple-R line of light bars. Elevated to Elite level performance in 2020/21, they deliver outstanding illumination in a spot beam pattern with a 30-degree spread to the left and right, leaving nothing in the dark. Through computer-aided design, the newly optimised lamp housing offers a reduction in wind noise when mounted on a roof.

FEATURES


- HIGHLY EFFICIENT LED TECHNOLOGIES
- SUPERIOR RANGE WITH LEFT/RIGHT SPREAD
- 5 YEAR WARRANTY
- LOW WIND NOISE
- ELECTRONIC THERMAL MANAGEMENT
- 'UNBREAKABLE' POLYCARBONATE LENS

TRIPLE-R ELITE ISOLUX PERFORMANCE


28 ELITE

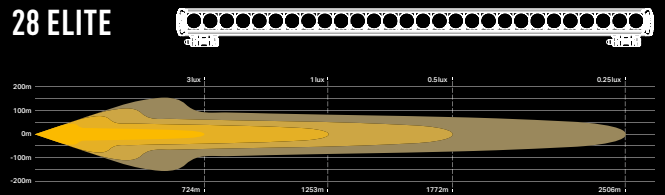

24 ELITE

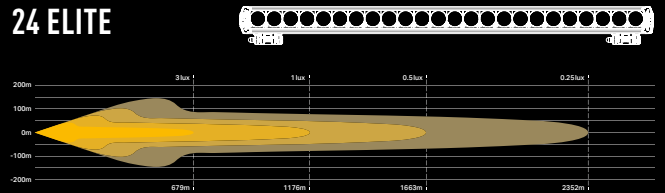


16 ELITE

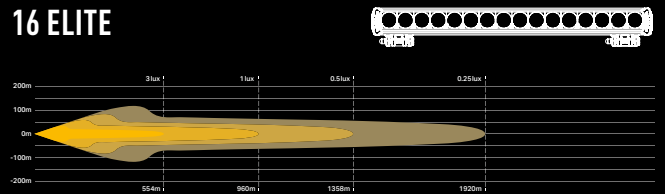

TECHNICAL SPECS

	16 ELITE	24 ELITE	28 ELITE
E-MARK REFERENCE	N/A	N/A	N/A
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	18,040	27,060	28,560
BEAM PATTERN	DRIVE	DRIVE	DRIVE
BEAM DISTANCE (0.25LX)	1,920M	2,352M	2,506M
NO. HIGH POWER LEDS	16	24	28
POWER CONSUMPTION	208W	312W	326W
CURRENT DRAW (AT 14.4V)	14.4A	21.7A	22.6A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	2,840G	4,140G	4,780G

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
TRIPLE-R 16 ELITE	765	105	73	103	73-103
TRIPLE-R 24 ELITE	1,125	105	73	103	73-103
TRIPLE-R 28 ELITE	1,305	105	73	103	73-103

TRIPLE-R ELITE LIGHT OUTPUT

TRIPLE-R 24 ELITE



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



TRIPLE-R SMARTVIEW



THE TRIPLE-R SMARTVIEW IS THE PINNACLE OF AUTOMOTIVE LIGHTING TECHNOLOGY. BOASTING INNOVATIVE FUNCTIONALITY THAT PROVIDES FOR ENHANCED SAFETY, COUPLED WITH LIGHTING PERFORMANCE AT THE PEAK OF LED TECHNOLOGY.

The Smartview connects effortlessly to your vehicle's electrical system with its 'Plug & Play' connectivity. The pre-programmed Anti-Theft Unit prevents the use of the lamp if removed from your vehicle. The 'Dashboard Controller' is a touch-screen device that lets you switch between five lighting modes, each with specific benefits for on-road and off-road situations. The lighting system delivers exceptional performance, making it stand out from others in the market.

FEATURES


- DASHBOARD CONTROLLER ENABLES 5 X MULTI-FUNCTION MODES
- PLUG & PLAY WIRING
- ANTI-THEFT MODULE
- 5 YEAR WARRANTY
- FULLY ECE APPROVED FOR ROAD USE
- INCLUDES SIDE & CENTRE MOUNT KIT



TECHNICAL SPECS - SMARTVIEW

	1250 E-BOOST	1250 E-MARK
E-MARK REFERENCE	N/A	45.0
VOLTAGE RANGE	10-32V	10-32V
RAW LUMENS	12,170	8,550
BEAM PATTERN	COMBO	COMBO
BEAM DISTANCE (0.25LX)	1,463M	930M
NO. HIGH POWER LEDS	12	12
POWER CONSUMPTION	105W	88W
CURRENT DRAW (AT 14.4V)	7.3A	6.1A
LED LIFE (HOURS)	50,000*	50,000*
WEIGHT	1,940G	1,940G

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
TRIPLE-R 1250 SMARTVIEW	590	105	73	103	73-103



TRIPLE-R 1250 SMARTVIEW FUNCTIONALITY



E-MARK COMPLIANT MODE

Enables the customer to operate the lamp in compliance with EU road-legal regulations.



E-BOOST MODE

Increases the intensity of light for maximum visibility. Off road use only.



NEAR-VIEW MODE

Provides superior levels of short-range illumination, ideal in more extreme weather conditions such as fog and snow.



DYNAMIC DIP

Delivers a smoother transition between high and low beam allowing time for the driver's eyes to adjust.



SPEED ADAPT MODE*

Beam pattern adjusts depending on the speed of the vehicle between 30mph-50mph (50kph-80kph).

*Speed Adapt only possible with Lazer CANMS Duo Interface (sold separately).



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST





THE SENTINEL RANGE OF ROUND LED DRIVING LIGHTS HAS BEEN EXPANDED TO INCLUDE 7-INCH VERSIONS, IN BOTH STANDARD AND ELITE GRADES. BLACK PRINTED CIRCUIT BOARDS CONTRIBUTE TO THE SLEEK DESIGN, WHILE THE BLACK BEZEL WITH ITS INTRICATE HEXAGONAL PATTERN PROVIDES A UNIQUE, MODERN LOOK.


The Sentinel 7-inch lamp exceeds expectations with its size and power rating, outpacing bigger, more powerful products. With an authentic 'combo' beam pattern, the central rows of LEDs and optics provide brilliant long-range illumination. The expertly crafted upper and lower sections of the Elite grade deliver a remarkable 65 degrees of enviable wide light spread.

FEATURES


- SUPPLIED WITH 'SLIM' DIECAST ALUMINIUM MOUNTING BRACKET
- ULTRA-REFLECTIVE VACUUM-METALLISED SPOT AND WIDE OPTICS
- STEALTH BLACK APPEARANCE
- 'UNBREAKABLE' POLYCARBONATE LENS
- COMBINATION OF 24 PREMIUM 'BIN' LEDS
- SAFER NIGHT DRIVING WITH 5000K LED COLOUR TEMPERATURE

SENTINEL ISOLUX PERFORMANCE

7" ELITE E-BOOST MODE*

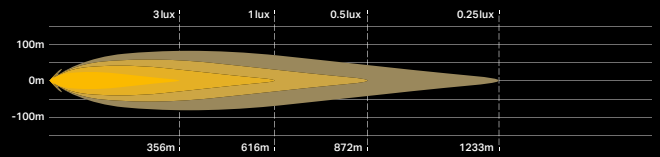


E-MARK MODE




On Road measurement data. *Boost function is engaged when the supplied **boost cap** is fitted to the lamp, when the vehicle is **off-road**.

7" STANDARD E-BOOST MODE*



E-MARK MODE




On Road measurement data. *Boost function is engaged when the supplied **boost cap** is fitted to the lamp, when the vehicle is **off-road**.

TECHNICAL SPECS – SENTINEL 7"

	7" STANDARD	7" ELITE
E-MARK REFERENCE	12.5	12.5
VOLTAGE RANGE	10-32V	10-32V
RAW LUMENS	5,208 / 1,041	10,248 / 2,049
BEAM PATTERN	SPOT / WIDE	SPOT / WIDE
BEAM DISTANCE (0.25LX)	1,217M	1,233M
NO. HIGH POWER LEDS	12	24
POWER CONSUMPTION	60 / 12W	116 / 23W
CURRENT DRAW (AT 14.4V)	4.3 / 0.9A	7.6 / 1.5A
LED LIFE (HOURS)	50,000*	50,000*
WEIGHT	1,500G	1,500G

*LED manufacturers specification



DIMENSIONS

SLIM MOUNT ONLY

SENTINEL 7" LIGHT OUTPUT

SENTINEL 7" ELITE – BOOST MODE



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST





WITH A FOCUS ON QUALITY, SENTINEL LED SPOTLIGHTS COMBINE THE BEST AND LATEST ELECTRONICS AND MATERIAL DESIGN TO DELIVER UNRIVALLED LIGHTING PERFORMANCE WITH CUTTING-EDGE CONTEMPORARY PRODUCT DESIGN.


Available in two versions: Standard and Elite. The Standard version is available in black or chrome finishes, while the Elite version is only available in black. Both versions feature a wide beam pattern, maximising visibility in all conditions. Standard lights feature optional white or amber integrated position light function, making them attractive for light commercials and heavy trucks looking to impress. The Elite version and corresponding non-chrome Standard lights deliver a 'stealth' look, guaranteed to turn heads.

FEATURES


- STANDARD AND ELITE GRADES AVAILABLE
- WIDE BEAM PATTERN (52° HORIZONTAL SPREAD)
- DUAL OUTPUT E-BOOST TECHNOLOGY (ECE APPROVED)
- OPTIONAL WHITE / AMBER POSITION LIGHT
- 5 YEAR WARRANTY
- 'UNBREAKABLE' POLYCARBONATE LENS

SENTINEL ISOLUX PERFORMANCE

9" ELITE E-BOOST MODE*

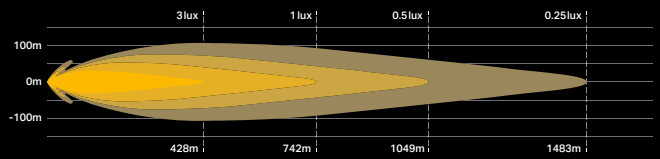


E-MARK MODE




On Road measurement data. *Boost function is engaged when the supplied **boost cap** is fitted to the lamp, when the vehicle is **off-road**.

9" STANDARD E-BOOST MODE*



E-MARK MODE





On Road measurement data. *Boost function is engaged when the supplied **boost cap** is fitted to the lamp, when the vehicle is **off-road**.

TECHNICAL SPECS - SENTINEL 9"

	9" STANDARD	9" ELITE
E-MARK REFERENCE	20.0	20.0
VOLTAGE RANGE	10-32V	10-32V
RAW LUMENS	9,520 / 1,904	15,232 / 3,046
BEAM PATTERN	WIDE / DRIVE	WIDE / DRIVE
BEAM DISTANCE (0.25LX)	1,414M	1,483M
NO. HIGH POWER LEDS	20	32
POWER CONSUMPTION	87 / 17W	145 / 29W
CURRENT DRAW (AT 14.4V)	6.0 / 1.2A	10.1 / 2.0A
LED LIFE (HOURS)	50,000*	50,000*
WEIGHT	2,500G	2,500G

*LED manufacturers specification



SENTINEL 9" LIGHT OUTPUT

SENTINEL 9" ELITE - BOOST MODE



SEE MORE GO FURTHER GO SAFER
MADE IN THE UK & BUILT TO LAST





INTRODUCING THE RP (RACEPOD) SERIES, THE NEWEST ADDITION TO THE LAZER RANGE. LED LIGHT PODS DELIVERING SERIOUS PERFORMANCE WITH SPOT AND HYPERSPOT BEAM OPTIONS.

These lights are built tough and are well matched for the harshest terrain and conditions. Spot for an impressive balance of distance and spread, or Hyperspot for a longer range beam with the added styling from an integrated white/amber backlight function.


To complement your RP light installation a comprehensive range of clip-on lenses including black 'Lazer' branded cover (supplied with each light), clear diffuser lenses, and yellow lenses.

FEATURES


- INTEGRATED WHITE/AMBER BACKLIGHT (HYPERSPOT ONLY)
- BLACK 'LAZER' PROTECTIVE LENS INCLUDED
- IP68 & IP69K PROTECTED
- HEAVY-DUTY MOUNTING BRACKET
- 5 YEAR WARRANTY
- MARINE GRADE ALUMINIUM LAMP BODY

RP SERIES ISOLUX PERFORMANCE

RP SPOT

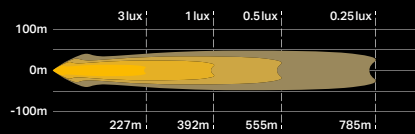

RP HYPERSPOT

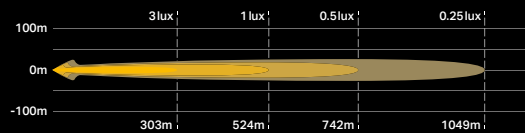


TECHNICAL SPECS – RP SERIES

	RP SPOT	RP HYPERSPOT
VOLTAGE RANGE	10-32V	10-32V
RAW LUMENS	8,940	4,520
BEAM PATTERN	SPOT	HYPERSPOT
BEAM DISTANCE (0.25LX)	785M	1,049M
NO. HIGH POWER LEDES	4	4
POWER CONSUMPTION	80W	41W
CURRENT DRAW (AT 14.4V)	5.2A	2.8A
LED LIFE (HOURS)	50,000*	50,000*
WEIGHT	1,500G	1,500G

*LED manufacturers specification

DIMENSIONS (mm)

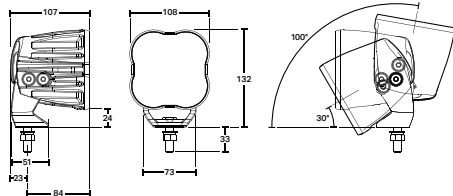

RP SERIES LIGHT OUTPUT

RP SPOT



SEE MORE GO FURTHER GO SAFER
MADE IN THE UK & BUILT TO LAST



ST EVOLUTION



THE SECOND GENERATION OF LAZER ST EVOLUTION LAMPS FEATURES STATE-OF-THE-ART LED TECHNOLOGY AND ELECTRICAL DESIGN; HOUSED IN A SLEEK, PRECISELY ENGINEERED ALUMINIUM ENCLOSURE, MAKING THE ST RANGE ESPECIALLY WELL-SUITED TO RURAL AND OFF-ROAD APPLICATIONS.

Throughout this new generation, there is improvement in light output with extended range and coverage. Compliant with road regulations and boasts category-leading low reference numbers, despite its exceptional performance. The ST Evolution range enhances the look of today's vehicles with its seamless and contemporary design.


FEATURES

- SEAMLESS, LOW-PROFILE DESIGN
- ECE APPROVED
- HIGH OUTPUT (PREMIUM BIN) 11W LEDS
- 'DRIVE' BEAM PATTERN
- INCLUDES VERSATILE 'CENTRE MOUNT' MOUNTING SYSTEM
- 'UNBREAKABLE' POLYCARBONATE LENS

TECHNICAL SPECS

	ST2	ST4	ST6	ST8	ST12
E-MARK REFERENCE	7.5	10.0	10.0	17.5	25.0
VOLTAGE RANGE	10-32V	10-32V	10-32V	10-32V	10-32V
RAW LUMENS	2,068	4,136	6,204	8,272	12,408
BEAM PATTERN	DRIVE	DRIVE	DRIVE	DRIVE	DRIVE
BEAM DISTANCE (0.25LX)	393M	555M	680M	786M	962M
NO. HIGH POWER LEDS	2	4	6	8	12
POWER CONSUMPTION	23W	47W	70W	95W	144W
CURRENT DRAW (AT 14.4V)	1.6A	3.3A	4.9A	6.6A	10.0A
LED LIFE (HOURS)	50,000*	50,000*	50,000*	50,000*	50,000*
WEIGHT	430G	670G	912G	1,150G	1,634G

*LED manufacturers specification




DIMENSIONS


	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
ST2	124	68	64	94	70-83
ST4	204	68	64	94	70-83
ST6	284	68	64	94	70-83
ST8	364	68	64	94	70-83
ST12	524	68	64	94	70-83

ST EVOLUTION ISOLUX PERFORMANCE


ST12

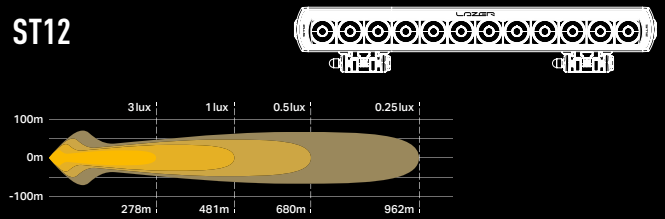


ST8

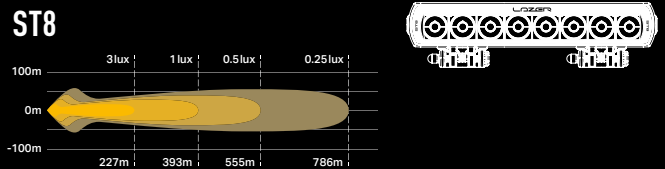


ST6

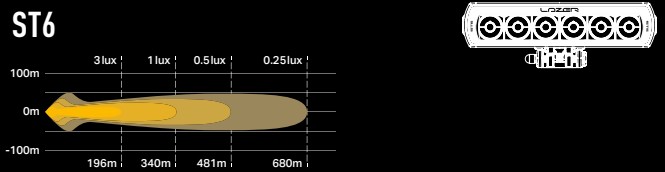

ST4

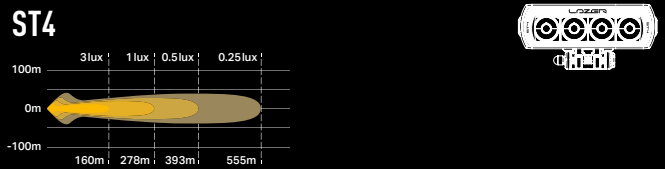


ST2

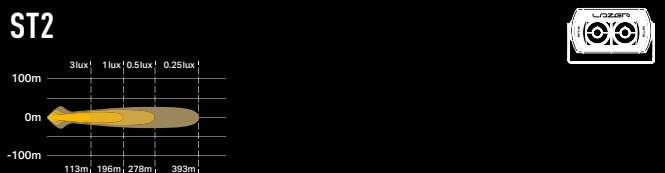

ST EVOLUTION LIGHT OUTPUT

ST-8 EVO

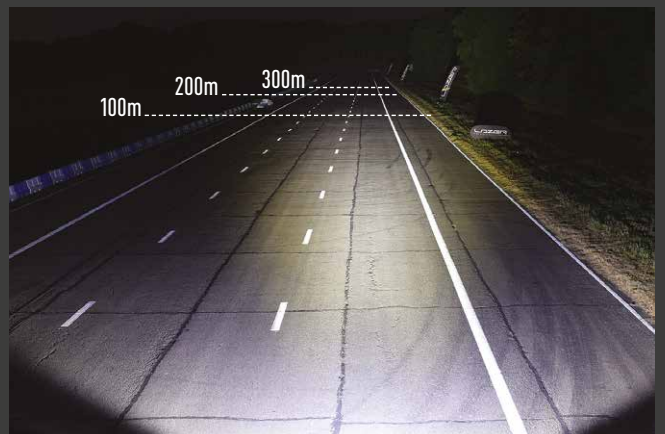

SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



T EVOLUTION






THE T-EVOLUTION LAMPS, EQUIPPED WITH 11W HIGH-OUTPUT LEDs, PROVIDE SUPERIOR ILLUMINATION LEVELS FOR OFF-ROAD ADVENTURES. THE T-EVOLUTION RANGE ENSURES THAT EVERY DETAIL IS VISIBLE, EVEN IN THE MOST CHALLENGING ENVIRONMENTS, THANKS TO THEIR EXTENSIVE COVERAGE AND BRIGHTNESS.

Engineered to conquer any terrain, the T-Evolution range of lamps features an 'unbreakable' polycarbonate lens which comes with a lifetime guarantee. Tested to IP69k standards to resist water and dust, ensuring these lamps will endure the toughest of conditions while delivering exceptional lighting performance optimised for off-road use, year after year, without losing their shine, all backed by a 5-year warranty.

FEATURES

- HIGH OUTPUT (PREMIUM BIN) 11W LEDs
- ULTRA-REFLECTIVE OPTICS DELIVER INCREDIBLE RANGE AND SPREAD OF LIGHT
- DYNAMIC DRIVE MODULATION
- DESIGNED AND BUILT IN THE UK
- E-COAT PROVIDES MAXIMUM CORROSION RESISTANCE


T EVOLUTION RANGE ISOLUX PERFORMANCE

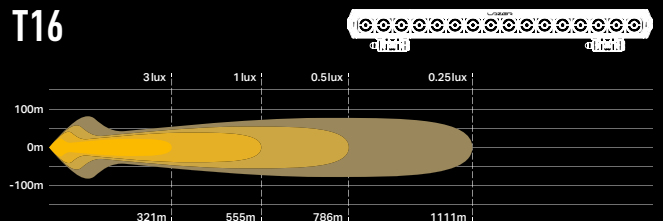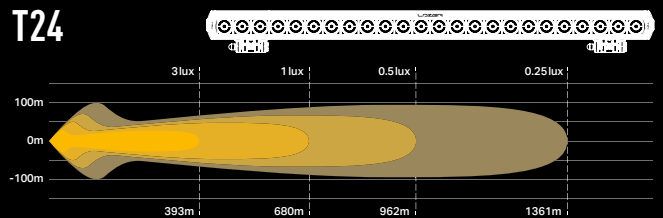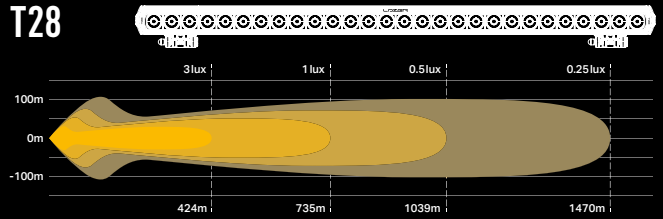

TECHNICAL SPECS

	T16	T24	T28
VOLTAGE RANGE	10-32V	10-32V	10-32V
RAW LUMENS	16,544	24,816	28,952
BEAM PATTERN	DRIVE	DRIVE	DRIVE
BEAM DISTANCE (0.25LX)	1,111M	1,361M	1,470M
NO. HIGH POWER LEDs	16	24	28
POWER CONSUMPTION	192W	262W	278W
CURRENT DRAW (AT 14.4V)	13.4A	18.2A	19.3A
LED LIFE (HOURS)	50,000*	50,000*	50,000*
WEIGHT	2,142G	3,084G	3,590G

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
T16	684	68	64	94	70-83
T24	1,004	68	64	94	70-83
T28	1,164	68	64	94	70-83

T EVOLUTION LIGHT OUTPUT

T24 EVO



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



UTILITY SERIES

LED WORK LAMP



BUILT AND DESIGNED IN THE UK, THE UTILITY SERIES OF WORK LIGHTS EMBODY THE PINNACLE OF INNOVATION AND PERFORMANCE, UTILISING THE LATEST HIGH-DENSITY LED TECHNOLOGY AND CUTTING-EDGE PRODUCT DESIGN. THE UTILITY SERIES IS THE ULTIMATE SOLUTION FOR ALL YOUR WORK LIGHTING NEEDS.


With options ranging from 25W to 80W, the Utility Series sets a new standard for work lights, incorporating patent-pending design features that result in brighter light, improved functionality and unparalleled reliability. Get more out of your work light with the Utility Series - see more, work safer.

FEATURES


- CLASS-LEADING PERFORMANCE
- SUPER-TOUGH CONSTRUCTION
- EMC PROTECTED - CISPR-25 (CLASS 3/5)
- IP69K WATERPROOF
- UNBREAKABLE POLYCARBONATE LENS
- PRE-WIRED CONNECTORS SUPPLIED

UTILITY SERIES ISOLUX PERFORMANCE


UTILITY-80




UTILITY-45



UTILITY-25 MAXX



UTILITY-25




50 lux line represents HSE guidelines for working outside at night while undertaking general tasks, such as labouring or moving goods.

TECHNICAL SPECS

	25	25 MAXX	45	80
VOLTAGE RANGE	10-32V	10-32V	10-32V	10-32V
RAW LUMENS	3,016	4,560	4,560	8,820
BEAM PATTERN	FLOOD	FLOOD	FLOOD	FLOOD
BEAM ANGLE TO 10% OF PEAK	78°	78°	80°	80°
BEAM ANGLE TO 50% OF PEAK	50°	50°	50°	50°
NO. HIGH POWER LEDS	4	4	4	4
POWER CONSUMPTION	25W	45W	45W	80W
CURRENT DRAW (AT 14.4V)	1.6A	3.1A	3.1A	5.5A
LED LIFE (HOURS)	50,000*	50,000*	50,000*	50,000*
WEIGHT	360G	360G	1,260G	1,260G

*LED manufacturers specification



DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
UTILITY-25	56	79	86-100	24	79	33
UTILITY-25 MAXX	56	79	86-100	24	79	33
UTILITY-45 (SLIMLINE MOUNT)	85	108	132	40	108	117
UTILITY-45 (WIDE MOUNT)	85	108	132	60	108	133.5
UTILITY-80	107	108	132	51	108	73

UTILITY SERIES LIGHT OUTPUT

UTILITY-80



SEE MORE GO FURTHER GO SAFER

MADE IN THE UK & BUILT TO LAST



VEHICLE INTEGRATION KITS

DEVELOPED TO ENHANCE THE HIGH-END STYLING OF 4X4S, PICK-UP TRUCKS, AND LIGHT COMMERCIAL VEHICLES, THE LOOK AND FINISH OF OUR VEHICLE INTEGRATION KITS EMBODY THE QUALITY THAT REPRESENTS THE LAZER BRAND. TRANSFORM YOUR VEHICLE'S APPEARANCE AND UPGRADE YOUR DRIVING EXPERIENCE WITH LAZER'S GRILLE INTEGRATION KITS!

Principally designed for our Triple-R 750 lights, grille integration kits offer an aesthetic appeal while enhancing your driving safety and comfort. Providing a sophisticated look and featuring exceptional lighting performance, making navigating through low-light or night time conditions a breeze. With quick and easy mounting, 20 minutes is all you will need to complete the job, allowing more time to enjoy the stunning result of your installation.

The streamlined design and manufacturing process guarantees that the newest vehicle models will have access to the latest grille integration kits, ensuring a seamless experience for you. Upgrade your ride with the best light solutions - see more and drive safer with Lazer!




LAZER
HIGH PERFORMANCE LIGHTING

LAZER ACCESSORIES

FROM BESPOKE MOUNTING SOLUTIONS TO WIRING KITS, AND IMPACT COVERS TO CLIP-ON ACRYLIC LENSES, THE RANGE OF LAZER ACCESSORIES IS DESIGNED TO FULLY COMPLEMENT AND ENHANCE YOUR LIGHT INSTALLATION. THE PRODUCT RANGE INCLUDES:

- 12V WIRING HARNESS KITS (VARIOUS SETUPS)
- CANBUS INTERFACE SOLUTIONS
- LAMP MOUNTING BRACKETS
- QUICK FIT & RELEASE RALLY MOUNTING PODS
- ANTI-THEFT KITS
- AMBER AND DIFFUSER LENSES
- NEOPRENE IMPACT COVERS
- STAY BAR KIT

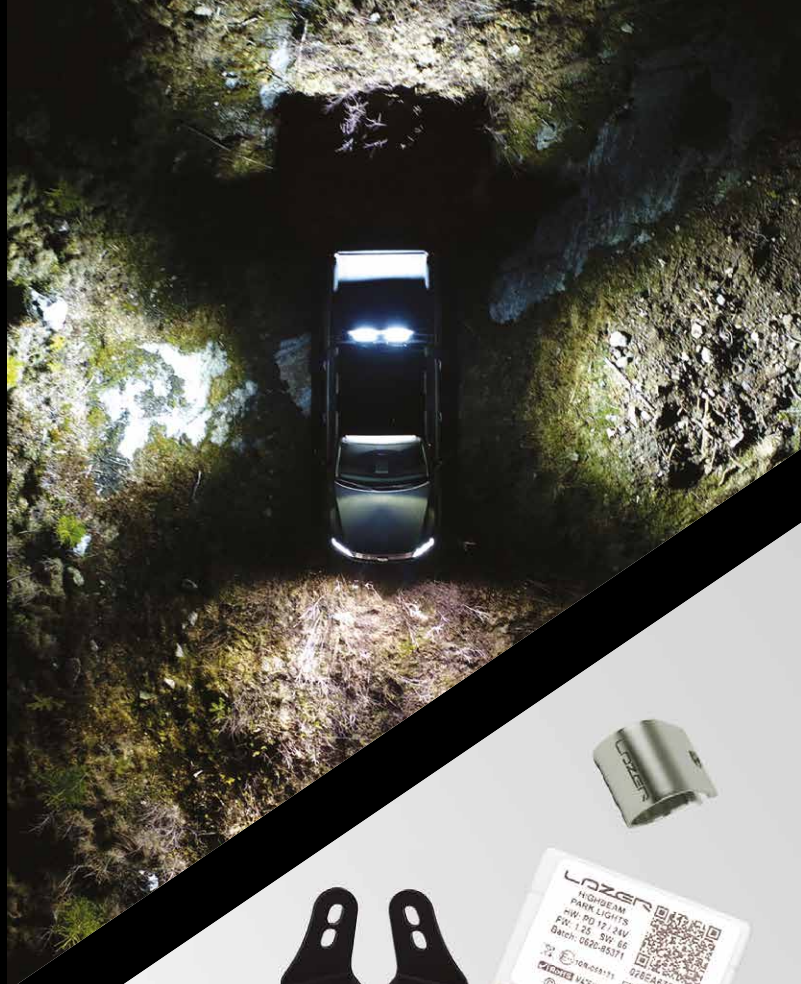

LAZER LAMPS PRODUCT RANGE

LINEAR	STANDARD	ELITE
LINEAR-6*	●	●
LINEAR-12	●	●
LINEAR-18†*	●	●
LINEAR-24 FLOOD	●	
LINEAR-24		●
LINEAR-36	●	●
LINEAR-42	●	●
LINEAR-48	●	●

TRIPLE-R	STANDARD	ELITE
TRIPLE-R 750	●	●
TRIPLE-R 850	●	●
TRIPLE-R 1000†	●	●
TRIPLE-R 1000 BEACON	●	
TRIPLE-R 1250†*	●	●
TRIPLE-R 1250 SMARTVIEW	●	
TRIPLE-R 16		●
TRIPLE-R 24*		●
TRIPLE-R 28		●

SENTINEL	STANDARD	ELITE
SENTINEL 7"	●	●
SENTINEL 9"	●	●

RP SERIES

RP SPOT		●
RP HYPERSPOT		●

ST/T EVOLUTION

ST2		●
ST4		●
ST6		●
ST8		●
ST12		●
T16		●
T24		●
T28		●

UTILITY SERIES

UTILITY-25		●
UTILITY-25 MAXX		●
UTILITY-45		●
UTILITY-80		●

†Available with i-LBA. *Available as Elite+ version.

DECEMBER 2023-V9

LAZER
HIGH PERFORMANCE LIGHTING

[LAZERLAMPS.COM](https://www.lazerlamps.com)

T +44 (0) 1992 677374
E sales@lazerlamps.com

Lazer Lamps Ltd, Calder House, Central Road, Harlow
Essex, CM20 2ST, United Kingdom



MADE IN THE UK & BUILT TO LAST



/ LAZERLAMPS